
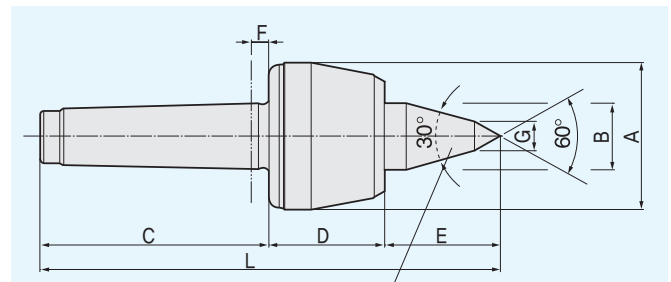


# BNL30-TYPE

## FEATURES ;

- Accuracy guaranteed to 0,003mm TIR (0,0001" ).
- Excellent for engine lathes and CNC lathes.
- Heat-treated point to HRC 60±2.
- High performance lip seal and deflected shaft design protects bearing space(Double Angular Contact bearing) from invasion by dust and coolant.
- Heat-treated body for extra strength, rigidity and long life.

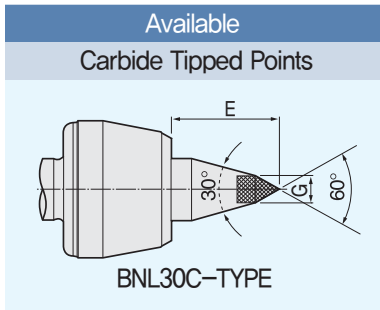

## Dimension

Unit : mm, kg

01	3	0	0	MT									
MODEL	MT	A	B	C	D	E	F	G	L	W.P Weight	Max, R.P.M	Weight	Max, Run Out
013002	2	50	25	68	43.5	40	6	10	151.5	500	5,000	0.7	0.003
013003	3	50	25	85	43.5	45	6	12	175.5	500	5,000	0.8	0.003
013004	4	69	32	108	55	53	8	14	216	500	3,800	1.9	0.003
013005	5	88	40	136	70	65	8	16	271	1,500	3,000	4.4	0.003
013006	6	105	50	189	81.5	77.5	10	18	348	2,500	2,800	8.7	0.005