



BNL30-TYPE

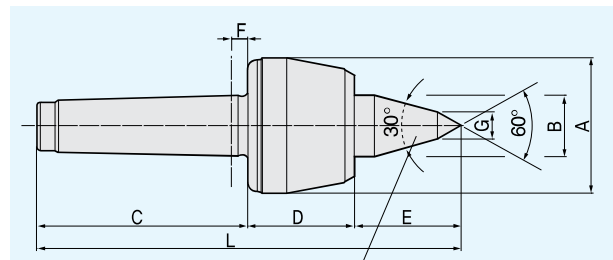

FEATURES ;

- Accuracy guaranteed to 0,003mm TIR (0,0001").
- Excellent for engine lathes and CNC lathes.
- Heat-treated point to HRC 60±2.
- High performance lip seal and deflected shaft design protects bearing space(Double Angular Contact bearing) from invasion by dust and coolant.
- Heat-treated body for extra strength, rigidity and long life.

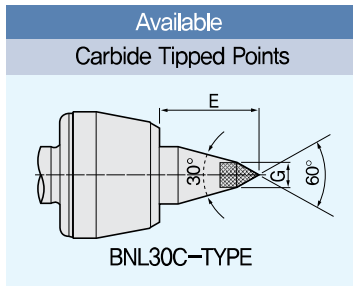

30° point is specially shaped for improved tool clearance

Dimension

01	3	0	0	MT										Unit : mm, kg		
MODEL	MT	A	B	C	D	E	F	G	L	Workpiece Weight	Max, R.P.M	Weight	Max, Run Out			
013002 (014002)	2	50	25	68	43,5	40	6	10	151,5	500	5,000	0,7	0,003			
013003 (014003)	3	50	25	85	43,5	45	6	12	175,5	500	5,000	0,8	0,003			
013004 (014004)	4	69	32	108	55	53	8	14	216	500	3,800	1,9	0,003			
013005 (014005)	5	88	40	136	70	65	8	16	271	1,500	3,000	4,4	0,003			
013006 (014006)	6	105	50	189	81,5	77,5	10	18	348	2,500	2,800	8,7	0,005			

※ (MODEL NO): Carbide Tip type.