



BNL30A-TYPE

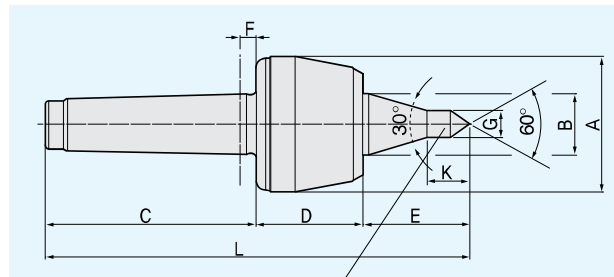

FEATURES ;

- Accuracy guaranteed to 0,003mm TIR (0,0001").
- Excellent for engine lathes and CNC lathes.
- Heat-treated point to HRC 60±2.
- High performance lip seal and deflected shaft design protects bearing space(Double Angular Contact bearing) from invasion by dust and coolant.
- Heat-treated body for extra strength, rigidity and long life.



Elongated center point is specially shaped for improved tool clearance(Diagram)

Dimension

01	5	0	0	MT	Unit : mm, kg									
MODEL	MT	A	B	C	D	E	F	G	K	L	Workpiece Weight	Max, R,P,M	Weight	Max, Run Out
015002 (016002)	2	50	25	68	43,5	50	6	10	19	161,5	500	5,000	0,7	0,003
015003 (016003)	3	50	25	85	43,5	50	6	10	19	178,5	500	5,000	0,8	0,003
015004 (016004)	4	69	32	108	55	63,5	8	12,5	23,5	226,5	500	3,800	1,9	0,003
015005 (016005)	5	88	40	136	70	80	8	12,5	23,5	286	1,500	3,000	4,4	0,003
015006 (016006)	6	105	50	189	81,5	105	10	14	30	375,5	2,500	2,800	8,7	0,005

※(MODEL NO): Carbide Tip type.